



PRIMA BF-7 TIGER	REF.NO.C13-1071
SNAPPY LX	C13-3172
PRIMA BF-7	C13-3173
BF 35 QD N	C13-3181
SNAPPY LX DATE	C13-3182
PRIMA BF-7 DATE	C13-3183

PARTS CATALOG

<W/Service Manual>

This revised parts catalog includes the external parts for a limited market version for Germany, the PRIMA BF-7 TIGER. These parts are marked with an asterisk. These are the only changes.


A separate Service Manual for this product will not issued. The SURE SHOT QWL, ETC.(C13-315X) Service Manual CY8-1200-118 should be used with the exception of the items separately listed in this Parts Catalog w/Service Manual.

Country of Origin Codes.

CODE	Country of Origin
C	CANON INC.
CJ	CANON INC. JAPAN
CJMC	CANON INC. JAPAN MADE IN CHINA

CANON [A] SNAPPY LX
 [B] PRIMA BF-7
 [C] BF 35 QD N
 [D] SNAPPY LX DATE
 [E] PRIMA BF-7 DATE
 [F] PRIMA BF-7 TIGER

REF.NO. C13-3172
 C13-3173
 C13-3181
 C13-3182
 C13-3183
 C13-1071

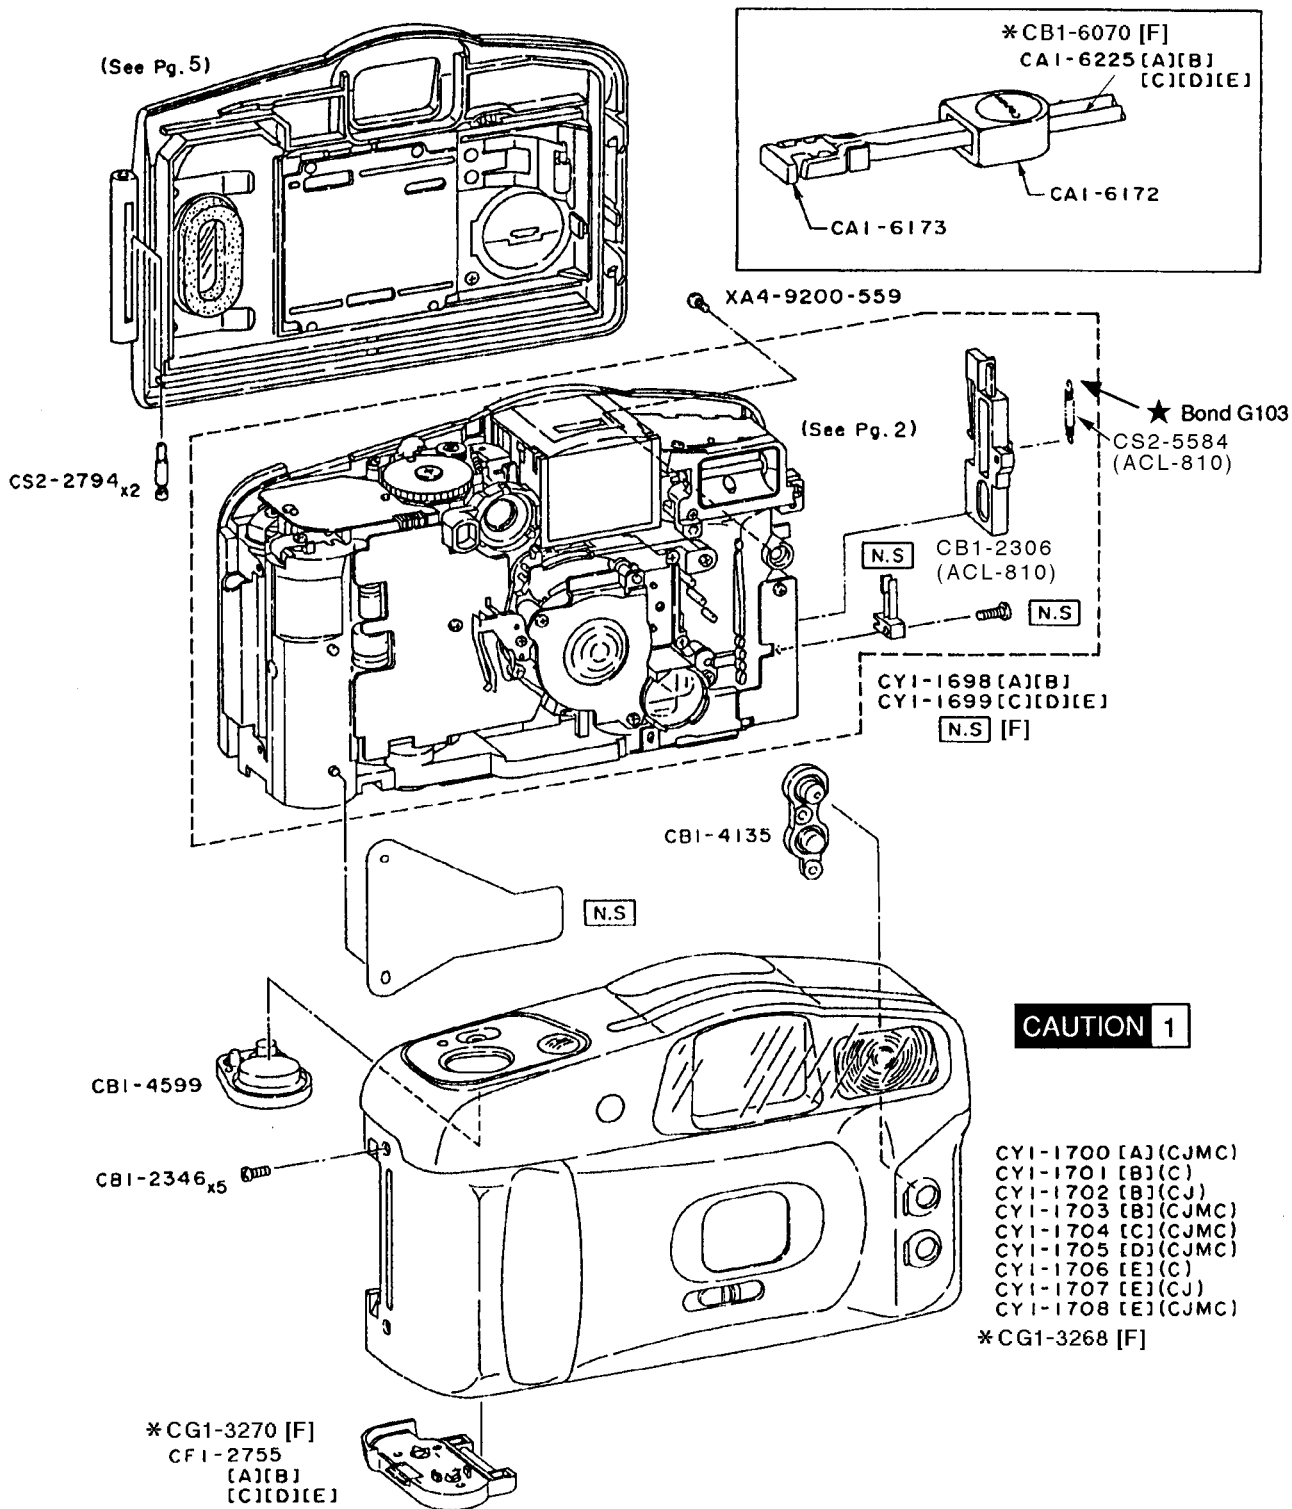

PARTS LIST

REF.No.C13-3172,73
C13-3181,82,83
C13-1071


NEW	PARTS NO.	CLASS	QTY	DESCRIPTION
	CA1-6172-000	E	1	COVER, STRAP LOCK
	CA1-6173-000	E	1	HOOK, STRAP LOCK
	CA1-6225-000	E	1	STRAP
	CB1-2306-000	D	1	LATCH, BACK, COVER
	CB1-2346-000	E	5	SCREW
	CB1-4135-000	E	1	BUTTON, FLASH
	CB1-4599-000	E	1	BUTTON, RELEASE
	CB1-6070-000	E	1	STRAP
	CF1-2755-000	C	1	COVER ASS'Y, BATTERY
	CG1-3268-000	D	1	COVER ASS'Y, FRONT
	CG1-3270-000	C	1	COVER ASS'Y, BATTERY
	CS2-2794-000	E	2	SHAFT, HINGE
	CS2-5584-000	E	1	SPRING, BACK COVER
	CY1-1698-000	D	1	BODY UNIT(NON-QD)
	CY1-1699-000	D	1	BODY UNIT(QD)
	CY1-1700-000	D	1	COVER ASS'Y, FRONT
	CY1-1701-000	D	1	COVER ASS'Y, FRONT
	CY1-1702-000	D	1	COVER ASS'Y, FRONT
	CY1-1703-000	D	1	COVER ASS'Y, FRONT
	CY1-1704-000	D	1	COVER ASS'Y, FRONT
	CY1-1705-000	D	1	COVER ASS'Y, FRONT
	CY1-1706-000	D	1	COVER ASS'Y, FRONT
	CY1-1707-000	D	1	COVER ASS'Y, FRONT
	CY1-1708-000	D	1	COVER ASS'Y, FRONT
	XA4-9200-559	D	1	SCREW

DISASSEMBLY CAUTIONS : 分解上の注意点

CAUTION 1 CAUTION HIGH VOLTAGE! BLEED THE MAIN CAPACITOR
メインコンデンサーの放電


Whenever the external covers are removed, the main capacitor must be discharged. Discharge at the (+) and (-) pads on the Flash Circuit Board.

前カバーを外したら必ず、ストロボの放電を行うこと。
放電はストロボ基板のメインコンデンサー(+),(-)端子で行う。

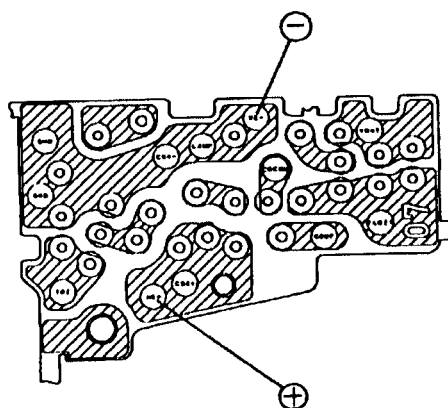

CANON [A] SNAPPY LX
 [B] PRIMA BF-7
 [C] BF 35 QD N
 [D] SNAPPY LX DATE
 [E] PRIMA BF-7 DATE
 [F] PRIMA BF-7 TIGER

REF.NO. C13-3172
 C13-3173
 C13-3181
 C13-3182
 C13-3183
 C13-1071

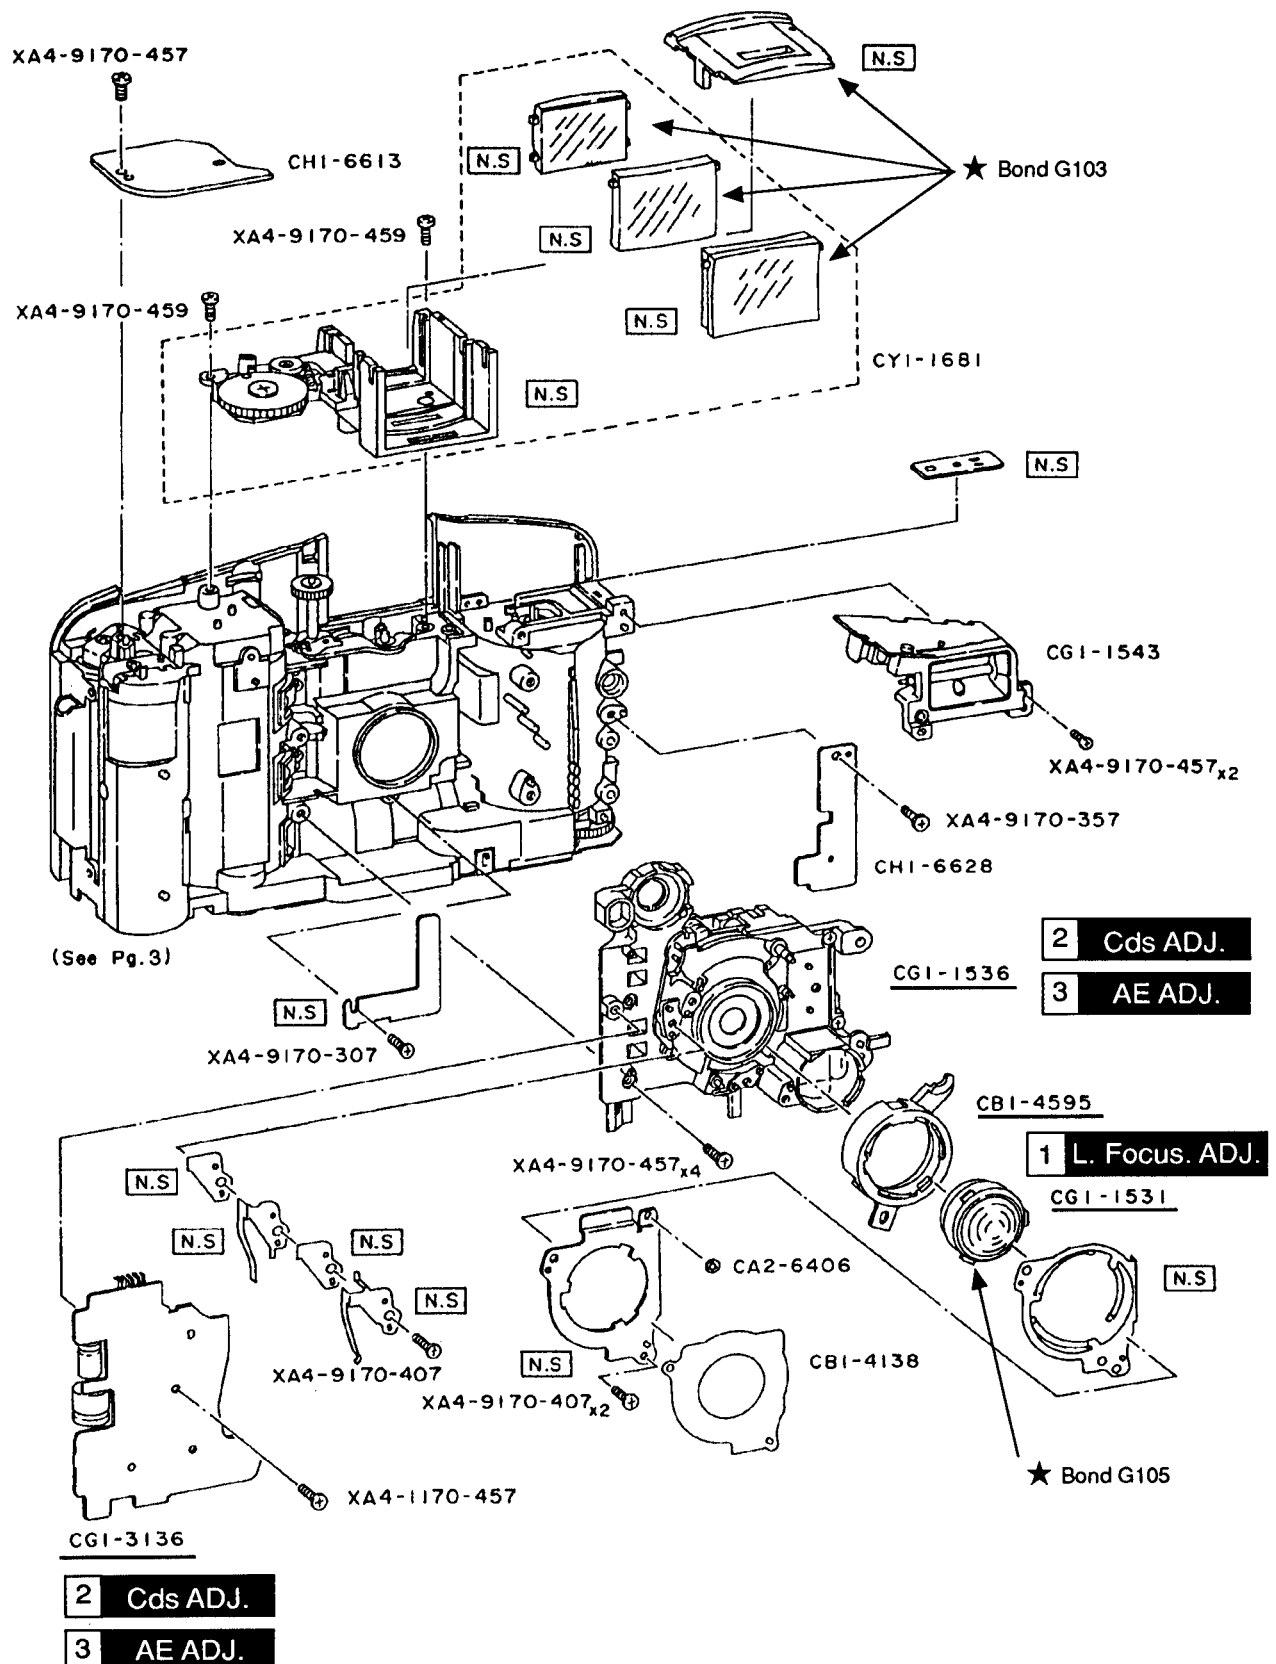

PARTS LIST

REF.No.C13-3172,73
C13-3181,82,83
C13-1071

NEW	PARTS NO.	CLASS	QTY	DESCRIPTION
	CA2-6406-000	E	1	NUT
	CB1-4138-000	E	1	SHEET, DUST SHIELD
	CB1-4595-000	D	1	RING ASS'Y, FOCUS
	CG1-1531-000	D	1	LENS BARREL ASS'Y
	CG1-1536-000	D	1	PANEL ASS'Y, FRONT
	CG1-1543-000	D	1	FLASH ASS'Y
	CG1-3136-000	D	1	PCB ASS'Y, MAIN
	CH1-6613-000	D	1	PCB, RELEASE
	CH1-6628-000	D	1	PCB, MANUAL
	CY1-1681-000	D	1	FINDER ASS'Y
	XA4-1170-457		1	SCREW
	XA4-9170-307		1	SCREW
	XA4-9170-357		1	SCREW
	XA4-9170-407		3	SCREW
	XA4-9170-457		7	SCREW
	XA4-9170-459		2	SCREW

ADJUSTMENTS : 調整項目

If any of the parts, underlined in the exploded views of this Parts Catalog are replaced, adjustment is necessary. Follow the procedures outlined in the SURE SHOT OWL, ETC. (C13-315X) Service Manual CY8-1200-118; but apply the standards listed in this Parts Catalog.

アンダーラインの部品を交換した場合、調整が必要。調整方法はSURE SHOT OWL シリーズのサービスマニュアルを参照のこと。

1 L. Focus. ADJ. (レンズピント調整)

If the Lens Barrel Unit (CG1-1531) or Focus Adjustment Ring (CB1-4595) is changed, do the Focus Adjustment (SM, pg. 3-14).

鏡筒ユニット(CG1-1531)または、ピント調整リング(CB1-4595) (S.M.Pg.15)

<Standard>	19.57 +/- 0.09	(Variable Focus Mirror Scale)
<規格>		(可変ピントミラー使用時)

2 Cds ADJ. (Cds調整)

If the Front unit (CG1-1536) or Main PCB Assembly is replaced, do the CdS Adjustment (SM, pg. 3-16).

前板ユニット(CG1-1536)または、メイン基板ユニット(CG1-3136) (S.M.Pg.16)

<Standard>	LV10.5 +/- 0.5	(Flash must fire at this light value)
<規格>	(K:17.68, ISO 100)	この輝度でフラッシュが発光すること。

3 AE ADJ. (AE調整)


If the Front unit (CG1-1536) or Main PCB Assembly is replaced, do the AE Adjustment (SM, pg. 3-18).

前板ユニット(CG1-1536)または、メイン基板ユニット(CG1-3136) (S.M.Pg.18)

<Standard>	At LV 12.5 Film Plane Illumination	+0.3 +/- 0.2EV
<規格>	LV12.5の時、	(K:17.68, ISO 100)

CANON [A] SNAPPY LX
 [B] PRIMA BF-7
 [C] BF 35 QD N
 [D] SNAPPY LX DATE
 [E] PRIMA BF-7 DATE
 [F] PRIMA BF-7 TIGER

REF.NO. C13-3172
 C13-3173
 C13-3181
 C13-3182
 C13-3183
 C13-1071

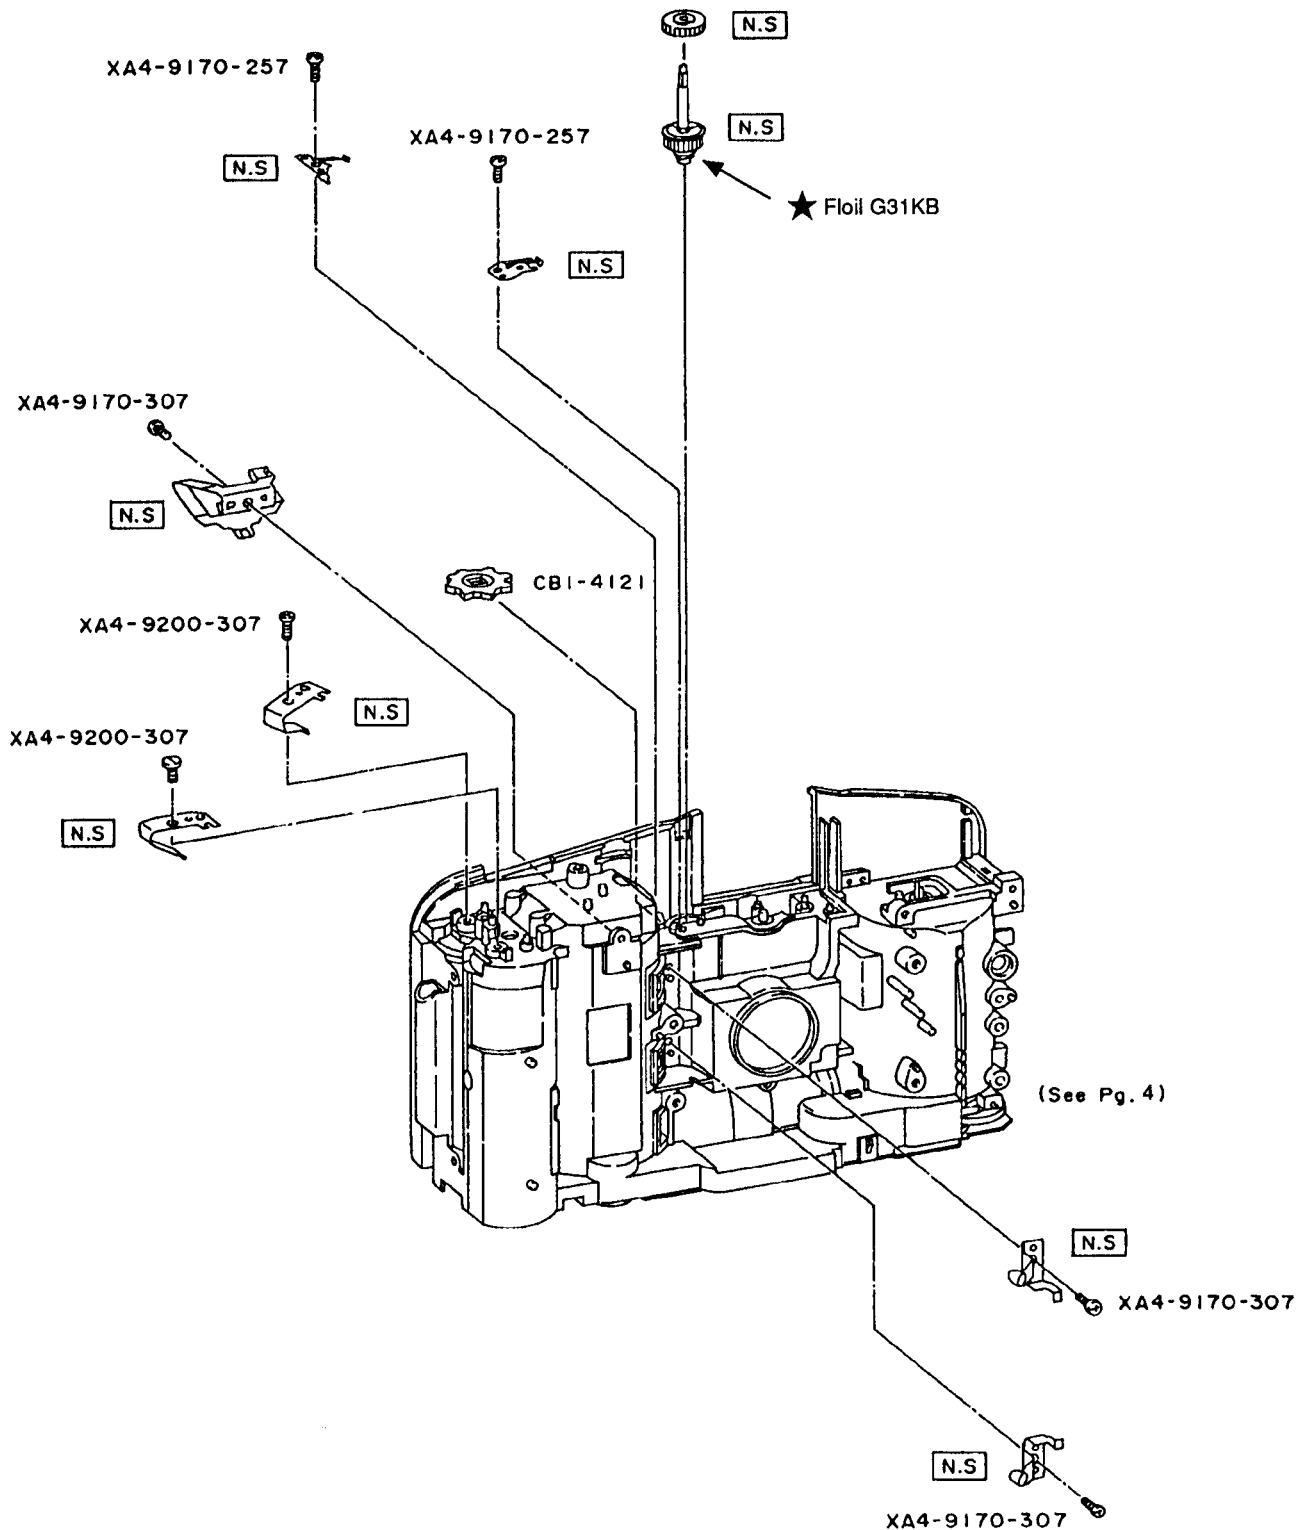


PARTS LIST

REF.No.C13-3172,73
C13-3181,82,83
C13-1071

NEW	PARTS NO.	CLASS	QTY	DESCRIPTION
	CB1-4121-000	D	1	SPROCKET
	XA4-9170-257		2	SCREW
	XA4-9170-307		3	SCREW
	XA4-9200-307		2	SCREW

CANON [A] SNAPPY LX
 [B] PRIMA BF-7
 [C] BF 35 QD N
 [D] SNAPPY LX DATE
 [E] PRIMA BF-7 DATE
 [F] PRIMA BF-7 TIGER

REF.NO. C13-3172
 C13-3173
 C13-3181
 C13-3182
 C13-3183
 C13-1071

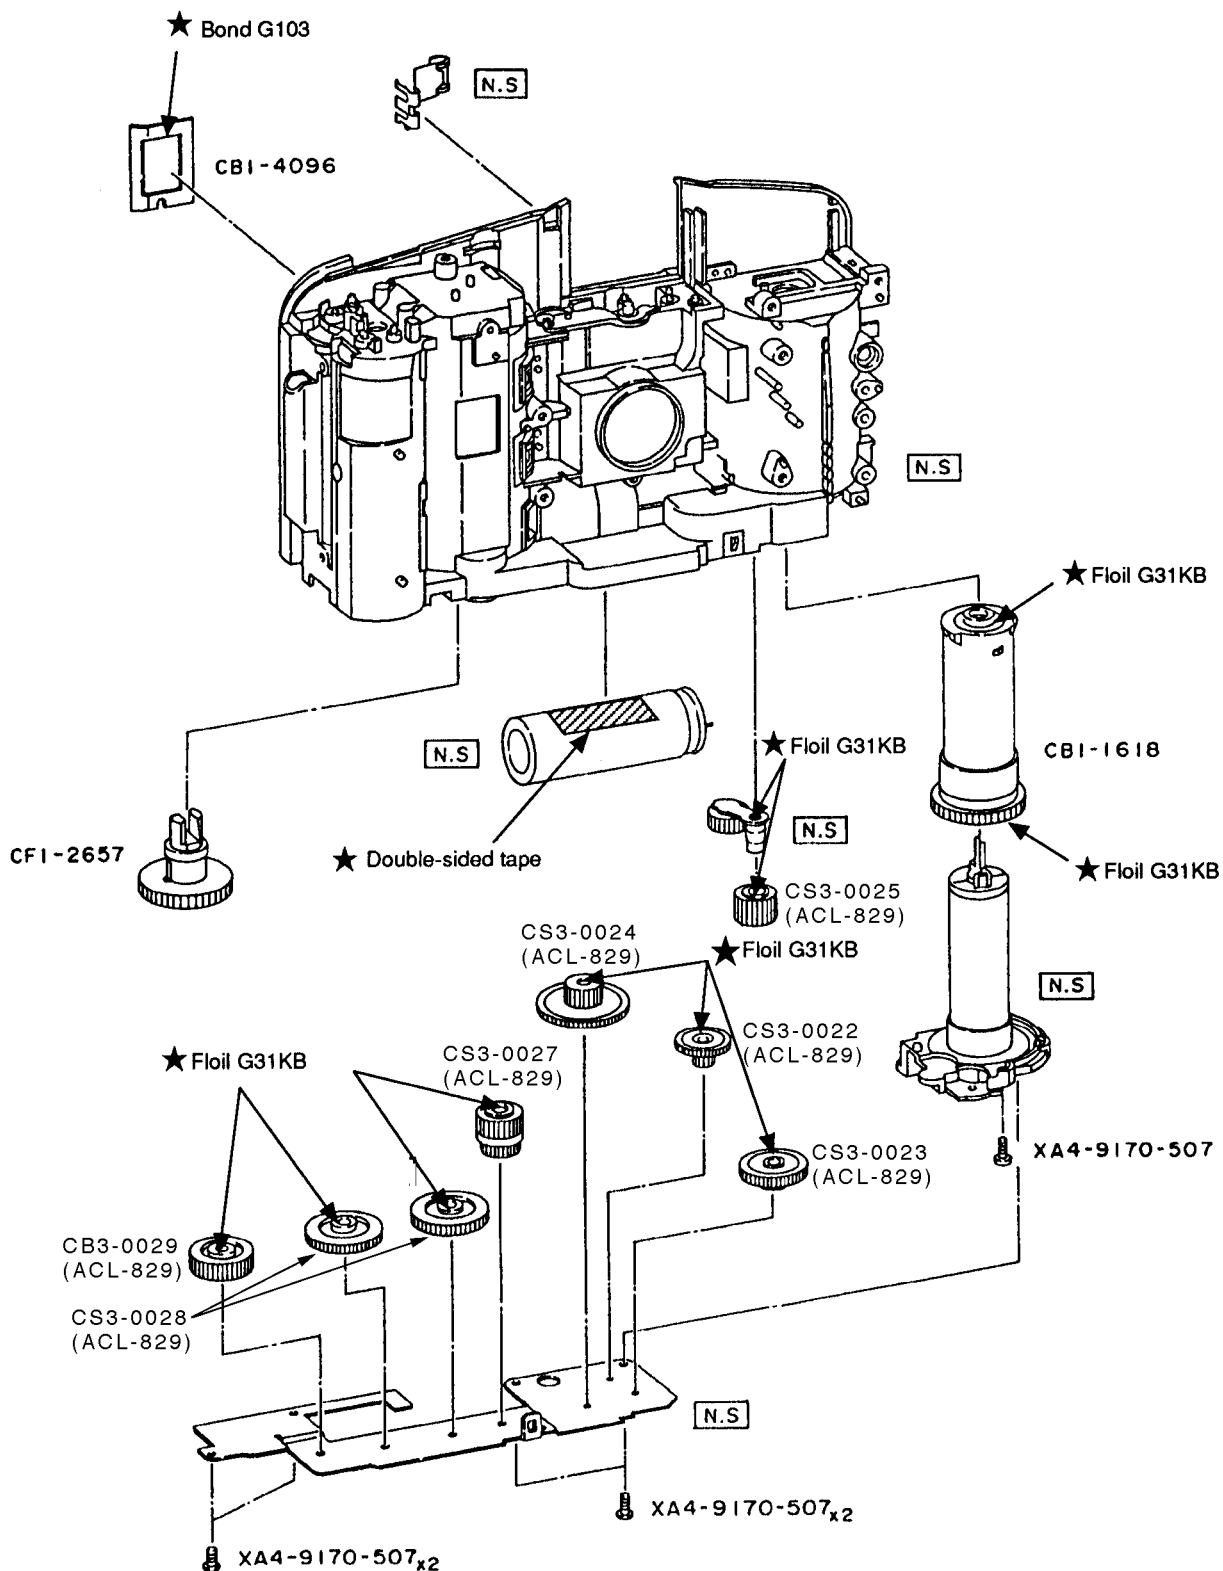

PARTS LIST


REF.No.C13-3172,73
C13-3181,82,83
C13-1071

NEW	PARTS NO.	CLASS	QTY	DESCRIPTION
	CB1-1618-000	E	1	SPOOL
	CB1-4096-000	C	1	COVER, HOLE
	CF1-2657-000	E	1	FORK, REWIND
	CS3-0022-000	D	1	GEAR, WIND1
	CS3-0023-000	D	1	GEAR, WIND2
	CS3-0024-000	D	1	GEAR, WIND3
	CS3-0025-000	D	1	GEAR, SUN
	CS3-0027-000	D	1	GEAR, REWIND1
	CS3-0028-000	D	2	GEAR, REWIND2
	CS3-0029-000	D	1	GEAR, REWIND3
	XA4-9170-507		5	SCREW


CANON [A] SNAPPY LX
[B] PRIMA BF-7
[C] BF 35 QD N
[D] SNAPPY LX DATE
[E] PRIMA BF-7 DATE
[F] PRIMA BF-7 TIGER

REF.NO. C13-3172
C13-3173
C13-3181
C13-3182
C13-3183
C13-1071


FOR DATE TYPE
[C][D][E]

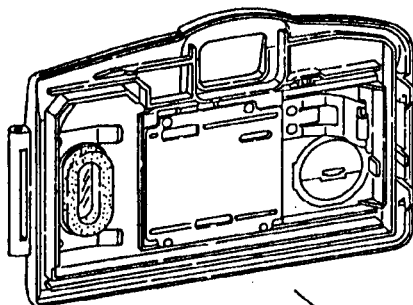

CGI-1535

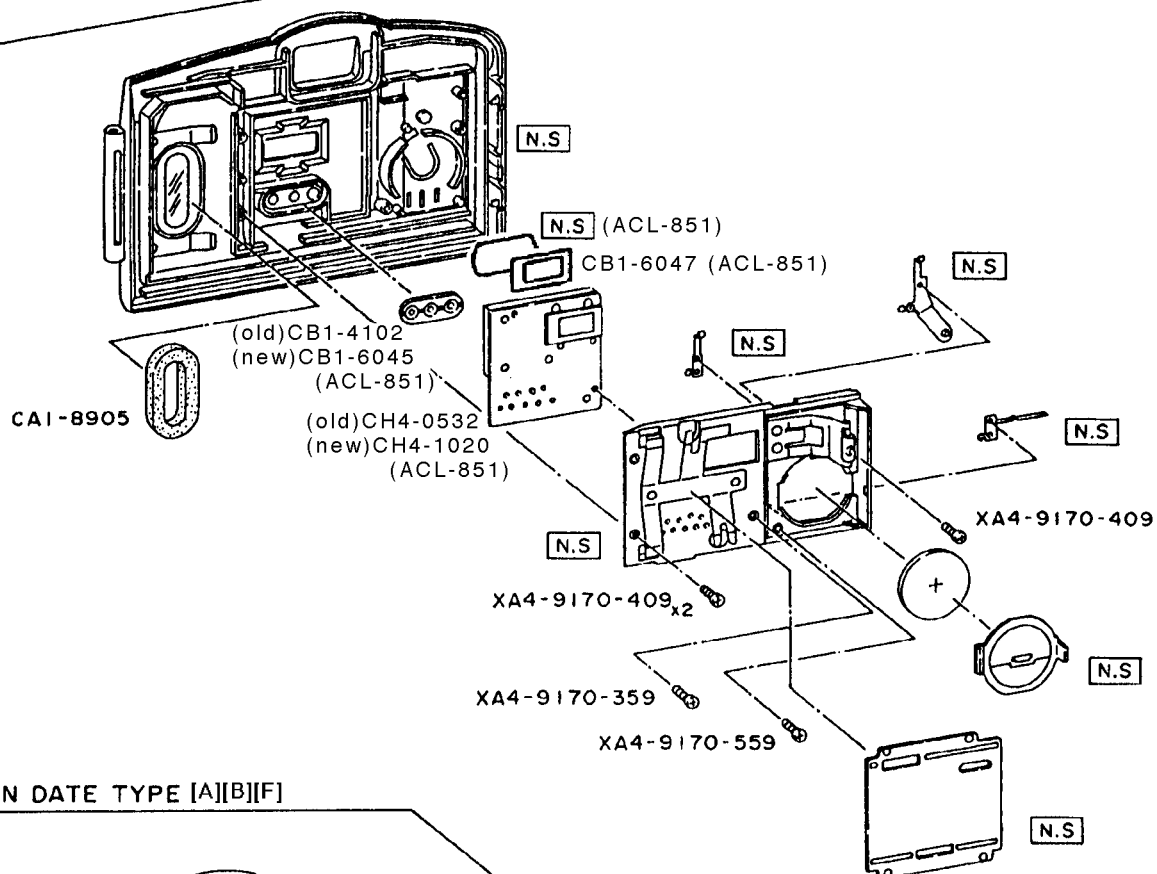

FOR NON DATE TYPE [A][B][F]

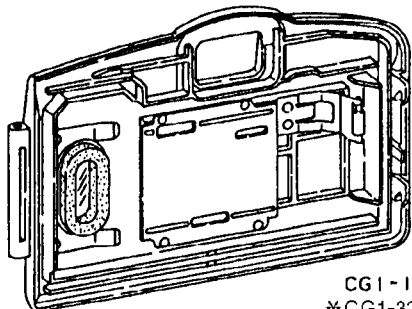

CG1-1539 [A][B]
*CG1-3269 [F]

PARTS LIST

REF.No.C13-3172,73
C13-3181,82,83
C13-1071

NEW	PARTS NO.	CLASS	QTY	DESCRIPTION
	CA1-8905-000	E	1	SHIELD, LIGHT
	CB1-4102-000	E	1	SWITCH, DATE
	CB1-6045-000	E	1	BUTTON, QD
	CB1-6047-000	E	1	COVER, QD
	CG1-1535-000	E	1	COVER ASS'Y, QD BACK
	CG1-1539-000	E	1	COVER ASS'Y, BACK
	CG1-3269-000	E	1	COVER ASS'Y, BACK
	CH4-0532-000	E	1	PCB ASS'Y, DATE
	CH4-1020-000	E	1	PCB ASS'Y, QD
	XA4-9170-359		1	SCREW
	XA4-9170-409		3	SCREW
	XA4-9170-559		1	SCREW