

SECTION 5
PERFORMANCE

CESSNA
MODEL 172Q

MAXIMUM RATE OF CLIMB

CONDITIONS:

Flaps Up
Full Throttle

NOTE:

Mixture leaned above 3000 feet for maximum RPM.

WEIGHT LBS	PRESS ALT FT	CLIMB SPEED KIAS	RATE OF CLIMB - FPM			
			-20°C	0°C	20°C	40°C
2550	S.L.	73	795	730	665	600
	2000	73	705	645	585	525
	4000	73	625	565	510	450
	6000	72	540	485	430	370
	8000	72	460	405	350	295
	10,000	72	380	325	275	---
	12,000	72	300	250	---	---

Figure 5-6. Maximum Rate of Climb

ENDURANCE PROFILE
45 MINUTES RESERVE
62 GALLONS USABLE FUEL

CONDITIONS:


2550 Pounds

Recommended Lean Mixture for Cruise

Standard Temperature

NOTE:

This chart allows for the fuel used for engine start, taxi, takeoff and climb, and the time during climb.

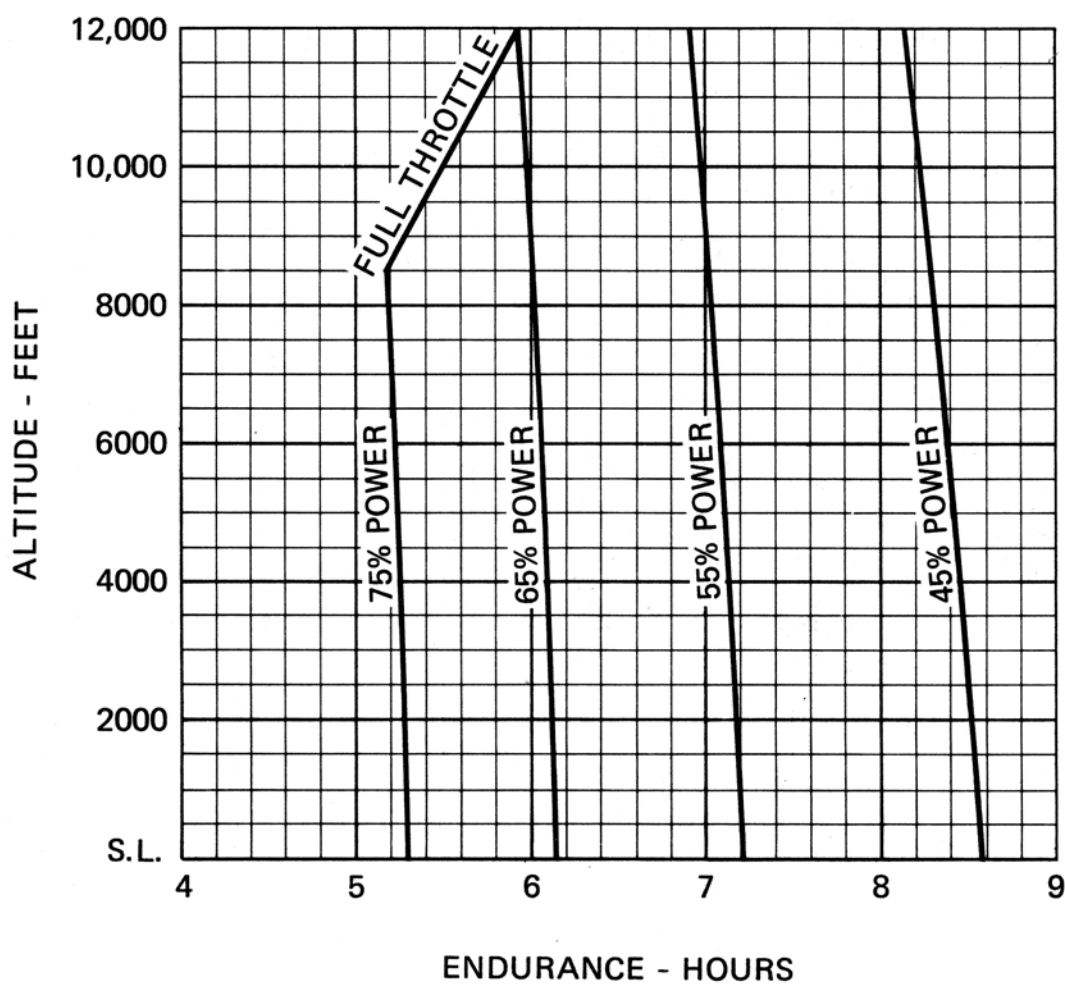

CRUISE PERFORMANCE

CONDITIONS:

2550 Pounds

Recommended Lean Mixture (See Section 4, Cruise)

PRESSURE ALTITUDE FT	RPM	20°C BELOW STANDARD TEMP			STANDARD TEMPERATURE			20°C ABOVE STANDARD TEMP		
		% BHP	KTAS	GPH	% BHP	KTAS	GPH	% BHP	KTAS	GPH
2000	2550	---	---	---	76	116	10.2	72	115	9.6
	2500	77	114	10.3	72	113	9.6	68	113	9.1
	2400	69	109	9.2	64	108	8.7	61	107	8.3
	2300	61	103	8.3	58	103	7.9	55	102	7.6
	2200	55	98	7.5	52	97	7.2	49	96	6.9
	2100	49	92	6.8	46	91	6.6	43	89	6.3
4000	2600	---	---	---	76	118	10.2	72	117	9.6
	2500	73	113	9.7	68	113	9.2	65	112	8.7
	2400	65	108	8.8	62	107	8.3	58	107	8.0
	2300	58	103	8.0	55	102	7.6	52	101	7.3
	2200	52	97	7.3	49	96	6.9	47	94	6.6
	2100	46	91	6.6	44	89	6.3	41	87	6.1
6000	2650	---	---	---	76	120	10.1	72	119	9.6
	2600	77	118	10.3	72	117	9.6	68	117	9.1
	2500	69	113	9.3	65	112	8.8	62	111	8.4
	2400	62	108	8.4	59	107	8.0	56	106	7.6
	2300	56	102	7.7	53	101	7.3	50	99	7.0
	2200	50	96	7.0	47	95	6.7	44	93	6.4
8000	2700	---	---	---	76	122	10.1	71	121	9.5
	2600	73	117	9.8	69	117	9.2	65	116	8.7
	2500	66	112	8.8	62	111	8.4	59	110	8.0
	2400	59	107	8.1	56	106	7.7	53	104	7.3
	2300	53	101	7.4	50	100	7.0	47	98	6.7
	2200	47	95	6.7	45	93	6.4	42	90	6.1
10,000	2700	77	122	10.2	72	121	9.6	68	121	9.1
	2600	69	117	9.3	65	116	8.8	62	115	8.4
	2500	63	112	8.5	59	110	8.1	56	109	7.7
	2400	57	106	7.8	53	104	7.4	50	103	7.0
	2300	51	100	7.1	48	98	6.8	45	96	6.5
12,000	2650	69	119	9.3	65	118	8.8	62	117	8.4
	2600	66	116	8.9	62	115	8.4	59	114	8.0
	2500	60	111	8.2	56	109	7.7	53	107	7.4
	2400	54	105	7.5	51	103	7.1	48	100	6.7
	2300	48	98	6.8	45	96	6.5	42	93	6.2

Figure 5-8. Cruise Performance

RANGE PROFILE 45 MINUTES RESERVE 62 GALLONS USABLE FUEL

CONDITIONS:

2550 Pounds
Recommended Lean Mixture for Cruise
Standard Temperature
Zero Wind

NOTE:

This chart allows for the fuel used for engine start, taxi, takeoff and climb, and the distance during climb.

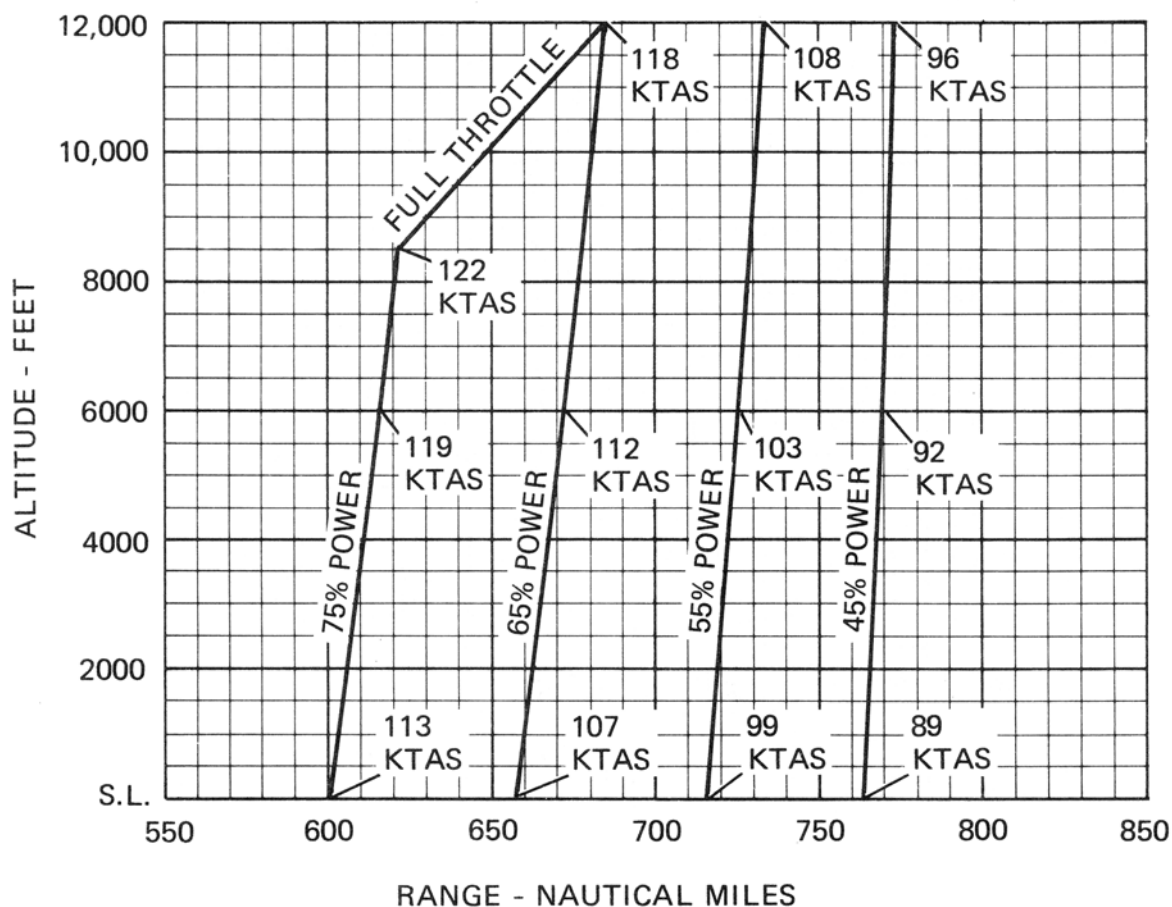


Figure 5-9. Range Profile (Sheet 2 of 2)

INTRODUCTION

Section 4 provides checklist and amplified procedures for the conduct of normal operation. Normal procedures associated with optional systems can be found in Section 9.

SPEEDS FOR NORMAL OPERATION

Unless otherwise noted, the following speeds are based on a maximum weight of 2550 pounds and may be used for any lesser weight. However, to achieve the performance specified in Section 5 for takeoff distance, the speed appropriate to the particular weight must be used.

Takeoff:

Normal Climb Out	75-85 KIAS
Short Field Takeoff, Flaps 10°, Speed at 50 Feet	57 KIAS

Enroute Climb, Flaps Up:

Normal, Sea Level	75-85 KIAS
Normal, 10,000 Feet	70-80 KIAS
Best Rate of Climb, Sea Level	73 KIAS
Best Rate of Climb, 10,000 Feet	72 KIAS
Best Angle of Climb, Sea Level	62 KIAS
Best Angle of Climb, 10,000 Feet	67 KIAS

Landing Approach:

Normal Approach, Flaps Up	65-75 KIAS
Normal Approach, Flaps 30°	60-70 KIAS
Short Field Approach, Flaps 30°	62 KIAS

Balked Landing:

Maximum Power, Flaps 20°	60 KIAS
------------------------------------	---------

Maximum Recommended Turbulent Air Penetration Speed:

2550 Lbs	105 KIAS
2150 Lbs	95 KIAS
1750 Lbs	85 KIAS

Maximum Demonstrated Crosswind Velocity:

Takeoff or Landing	15 KNOTS
------------------------------	----------